

# ADL20 4 to 20mA DC Current USB Datalogger

## Built-in multifunction 2000 count LCD display

### Features:

- Record up to 31,320 DC Current readings
- User adjustable sampling rate from 1 second to 24 hours
- High/Low Alarms with visual alert when settings are exceeded
- 2 LEDs indicate status of record and alarm
- USB interface for transferring recorded data to your PC
- Includes 3.6V Lithium battery, test leads with alligator clips, protective cap, and software

### Applications:


Monitor single channel 4-20mA current loops commonly used in process control applications including temperature, pressure, flow, humidity, level, and other measurements

Eliminate manual recording of data over time



### Specifications

Channels	Single, DC Voltage
DC Current Range	0 to 48.00V
Accuracy	±0.5%
Resolution	0.01V
Datalogger	31,320 points
Sample Rate	Selectable 1 second to 24 hours
PC Interface	USB port
Power	3.6V Lithium Battery (37-66)
Dimensions	4.2 x 0.9 x 0.9" (107 x 24 x 24mm)
Weight	2oz (55g)

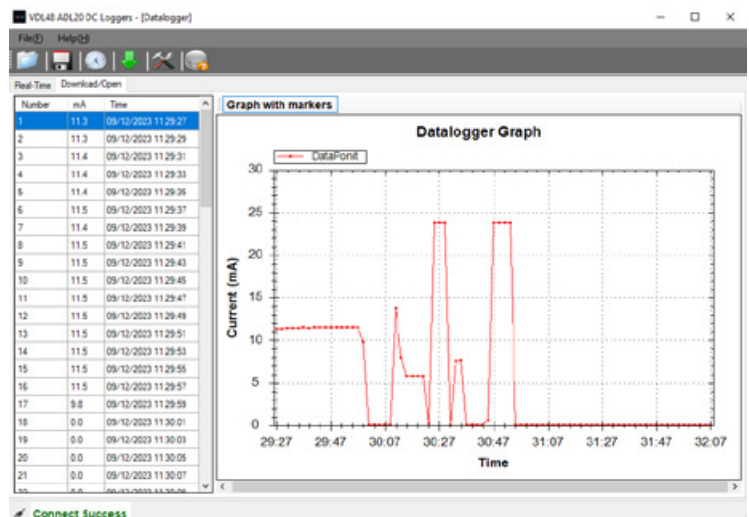

### Ordering Information:

ADL20 4 to 20mA DC Current USB Datalogger  
37-66 3.6V Lithium Battery -2 pack

