


Setting up an Axis Camera to allow ONVIF Users

Find the Camera to be installed and click on that ID


IP AXIS IP Utility
File View Tools Help

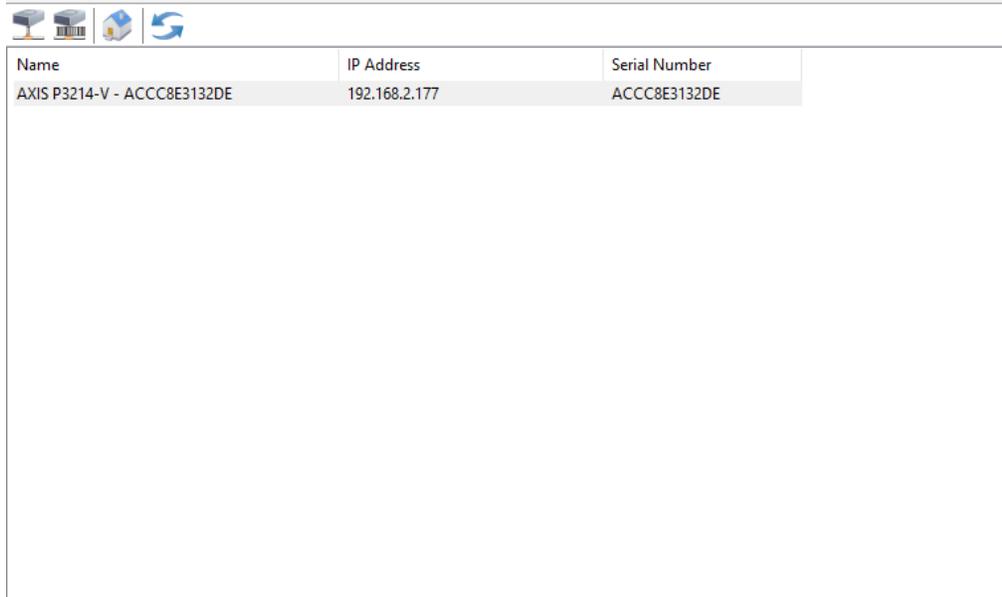

Name	IP Address	Serial Number
AXIS P3214-V - ACCC8E3132DE	192.168.2.177	ACCC8E3132DE

The video feed will pop up. Go into Setup.

If prompted for a User/Password default is root/pass

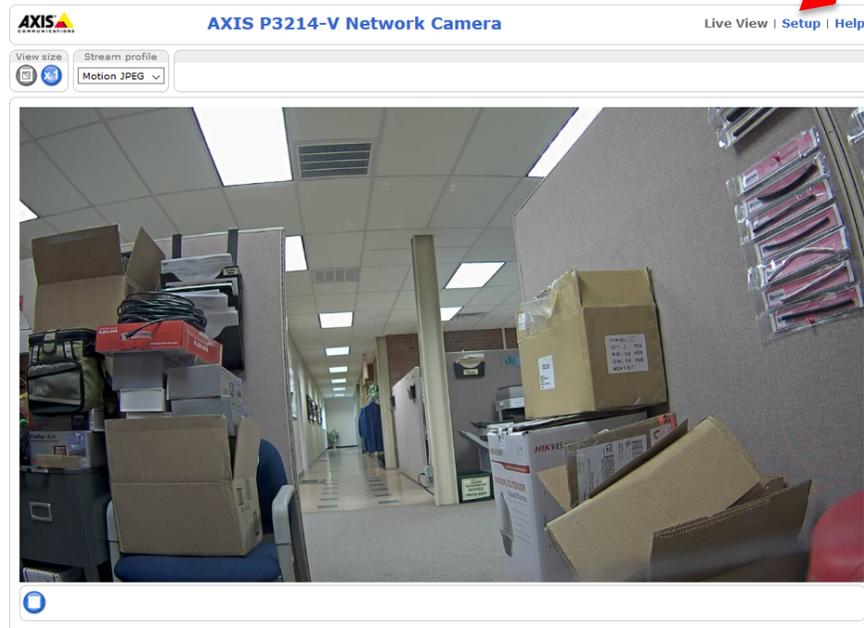


AXIS P3214-V Network Camera Live View | Setup | Help

View size: x4 Stream profile: Motion JPEG

The video feed shows a hallway with a desk, a chair, and several cardboard boxes. A red arrow points to the 'Setup' link in the top right corner of the interface.

Setting up an Axis Camera to allow ONVIF Users

This will bring you to the main setup page. To set up the ONVIF User go to System Options

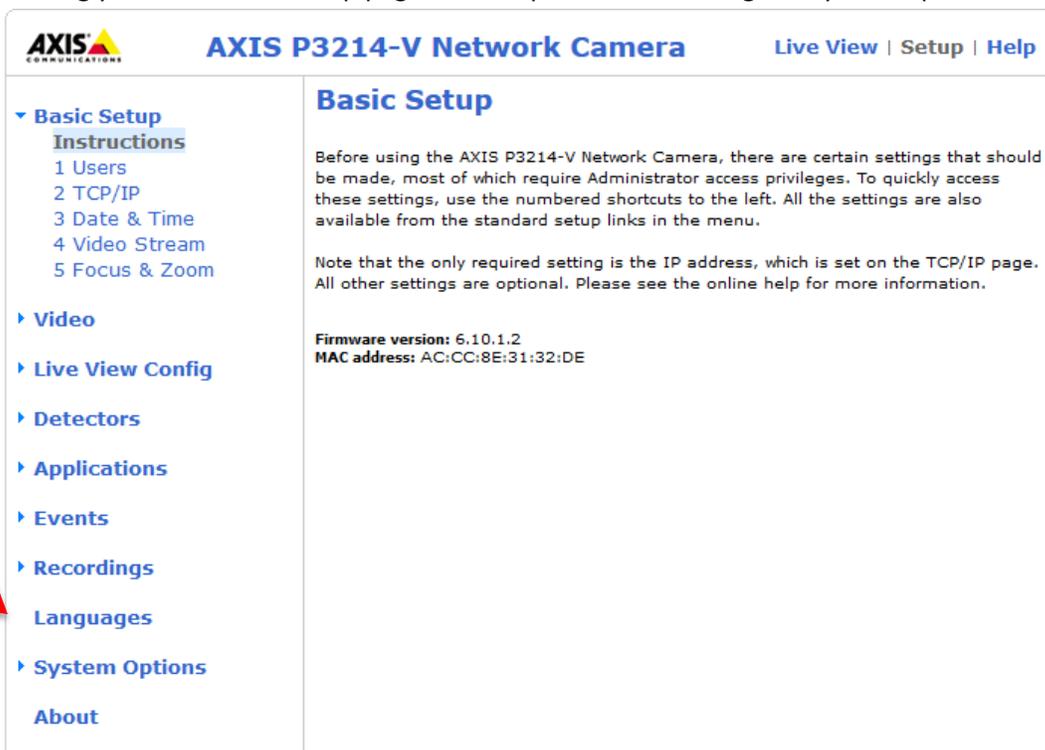

AXIS COMMUNICATIONS **AXIS P3214-V Network Camera** [Live View](#) | [Setup](#) | [Help](#)

Basic Setup


Before using the AXIS P3214-V Network Camera, there are certain settings that should be made, most of which require Administrator access privileges. To quickly access these settings, use the numbered shortcuts to the left. All the settings are also available from the standard setup links in the menu.

Note that the only required setting is the IP address, which is set on the TCP/IP page. All other settings are optional. Please see the online help for more information.

Firmware version: 6.10.1.2
MAC address: AC:CC:8E:31:32:DE

- Basic Setup
 - Instructions
 - 1 Users
 - 2 TCP/IP
 - 3 Date & Time
 - 4 Video Stream
 - 5 Focus & Zoom
 - Video
 - Live View Config
 - Detectors
 - Applications
 - Events
 - Recordings
 - Languages
 - System Options
 - About

This will bring up a new list. Under Security select ONVIF

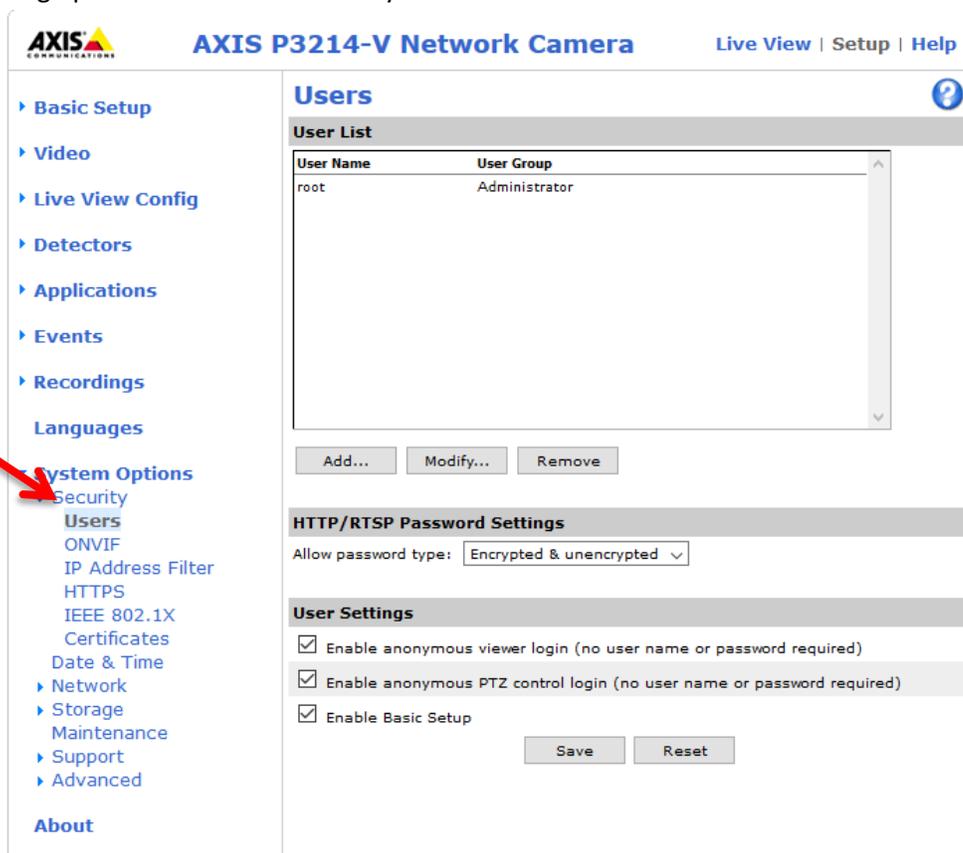

AXIS COMMUNICATIONS **AXIS P3214-V Network Camera** [Live View](#) | [Setup](#) | [Help](#)

Users ?

User List

User Name	User Group
root	Administrator

[Add...](#) [Modify...](#) [Remove](#)

HTTP/RTSP Password Settings

Allow password type: ▾

User Settings

- Enable anonymous viewer login (no user name or password required)
- Enable anonymous PTZ control login (no user name or password required)
- Enable Basic Setup

[Save](#) [Reset](#)

- Basic Setup
- Video
- Live View Config
- Detectors
- Applications
- Events
- Recordings
- Languages
- System Options
 - Security
 - Users
 - ONVIF
 - IP Address Filter
 - HTTPS
 - IEEE 802.1X
 - Certificates
 - Date & Time
 - Network
 - Storage
 - Maintenance
 - Support
 - Advanced
- About

Setting up an Axis Camera to allow ONVIF Users

Under ONVIF add a new user as Administrator

The screenshot shows the web interface for an Axis P3214-V Network Camera. The top navigation bar includes the Axis logo, the camera model name, and links for Live View, Setup, and Help. A left sidebar contains a menu with categories like Basic Setup, Video, Live View Config, Detectors, Applications, Events, Recordings, Languages, System Options, and About. The main content area is titled 'ONVIF' and shows the ONVIF Version as Profile S. Below this is a 'Users List' table with columns for User Name and User Group. The table contains one entry: 'tech' with the group 'Administrator'. Below the table are three buttons: 'Add...', 'Modify...', and 'Remove'. A red arrow points to the 'Add...' button. At the bottom of the main content area, there is a 'See also:' link pointing to 'ONVIF Media Profiles'.

AXIS P3214-V Network Camera Live View | Setup | Help

ONVIF ONVIF Version: Profile S

User Name	User Group
tech	Administrator

[Add...](#) [Modify...](#) [Remove](#)

See also: [ONVIF Media Profiles](#)

Setting up an Axis Camera to allow ONVIF Users

The image shows the Axis P3214-V Network Camera web interface. On the left, a 'System Options/ONVIF User Setup' dialog box is open, displaying fields for 'User name', 'Password', and 'Confirm password'. Under 'User group', three radio buttons are visible: 'Media user', 'Operator', and 'Administrator'. A red arrow points to the 'Administrator' radio button, which is selected. The 'OK' and 'Cancel' buttons are at the bottom of the dialog.

The main interface is titled 'AXIS P3214-V Network Camera' and shows the 'ONVIF' configuration page. The 'ONVIF' section indicates 'ONVIF Version: Profile S'. Below this is a 'Users List' table with two columns: 'User Name' and 'User Group'. The table contains one entry: 'tech' with 'Administrator' as the user group. Below the table are 'Add...', 'Modify...', and 'Remove' buttons. A 'See also: ONVIF Media Profiles' link is visible at the bottom of the page.

User Name	User Group
tech	Administrator

The Camera is now setup to accept ONVIF users and work with the IP Pro series